



Network Video Recorder

NVR201-08LP



Key Feature

- 8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Plug & Play with up to 8 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access



Specifications NVR201-08LP

Video and Audio

IP Video Input	8-ch
Two-way audio Input	1-ch, RCA

Network

Incoming bandwidth	80Mbps
Outgoing bandwidth	64Mbps
Remote connection	128

Video/Audio Output

HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch

Decoding

Compression	H.264
Live view/ Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 4MP@20, 8 x 720p@25

Hard Disk

SATA	1 SATA interface
Capacity	up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Server, P2P
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0


PoE

Interface	8 independent 100 Mbps PoE network interfaces
Supported Standard	IEEE 802.3at

General

Power Supply	52V DC
Consumption (without HDD and PoE)	≤ 8 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	270 × 205 × 42 mm (10.6" × 8.1" × 1.7")
Weight (without HDD)	≤ 0.72 Kg (1.59 lb)

Dimensions

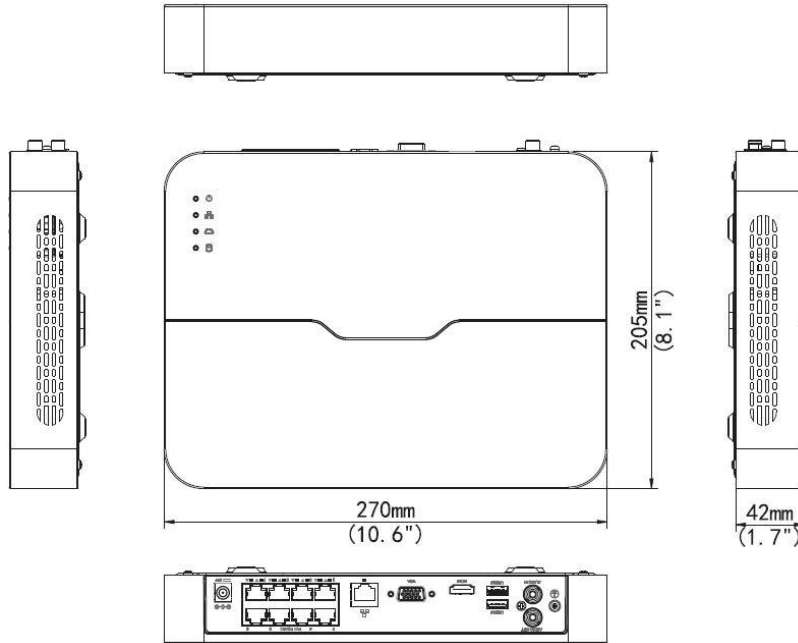

Rear Panel

